


R Panel

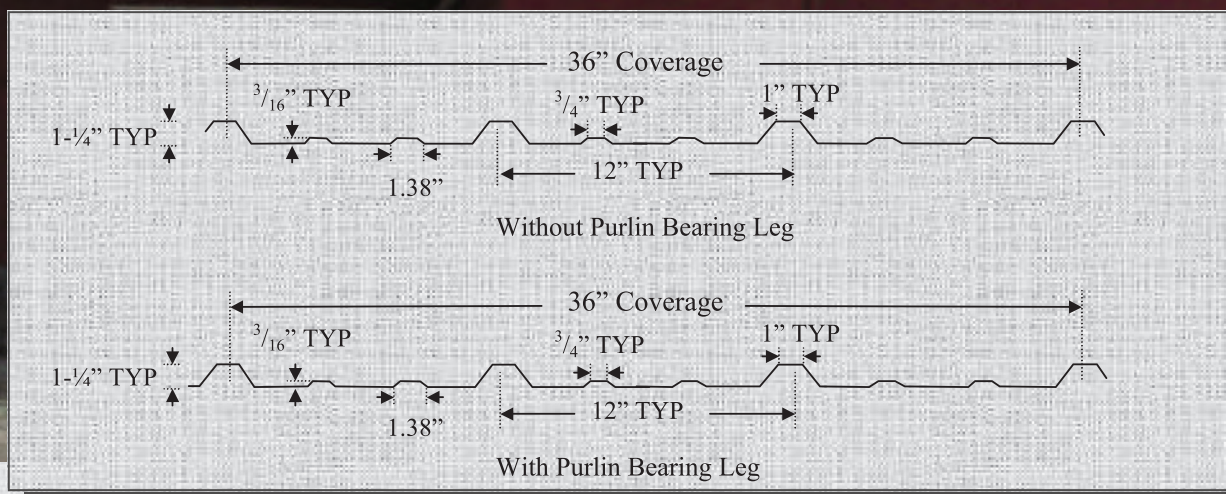

Panel Features

- Available in Lengths 1' - 50'
- Gauge: 26GA 80,000 psi steel
- 3 Colors Available with Purlin-Bearing Leg
- 4 Colors Available without Purlin-Bearing Leg
- Also Available in Acrylic Coated Galvalume with Purlin-Bearing Leg
- 36" Panel Coverage, 1-1/4" Rib Height
- Minimum Roof Slope: 3:12 or 1:12*
- Applies over Solid Substrate or Open Purlins
- Can be job packed to customer specifications
- Full Line of Standard and Custom made Trim and Accessories

*For a roof with a slope that is less than 3:12, side lap sealant tape and stitch screws should be used.

R-Panel features Akzonobel Ceram-A-Star 1050 Siliconized Polyester Paint System starting with a zinc phosphate pre-treatment followed by:

Top: .2 Mils Yellow Ultra Flex Primer, .8 Mils Siliconized Polyester

Bottom: .2 Mils Yellow Ultra Flex Primer, .3 Mils White Polyester Backer

Bare galvanized and galvalume products have an acrylic coating. This coating helps protect the metal during manufacturing and installation.